

# A.O.SMITH ELECTRICAL PRODUCTS COMPANY

A DIVISION OF A.O.SMITH CORPORATION



## NEW PRODUCT ANNOUNCEMENT

**NEW!**

## HEATCRAFT REPLACEMENT MOTORS BOHN, CHANDLER, CLIMATE CONTROL AND LARKIN

Stock No. 9721

**3-in-1™**  
Replaces 1/12, 1/15, 1/20  
PSC and Low Efficient  
Shaded Pole Designs

Reversing plug  
for easy  
rotation change




**ENERGY SAVINGS  
PSC DESIGN**



50% More Efficient than Shaded Pole Motors

Use of a permanent split capacitor design allows the motor to deliver more power with a lower amp draw. Cooler operation results in fewer failures. Ball bearings provide smooth, quiet operation and extended motor life.

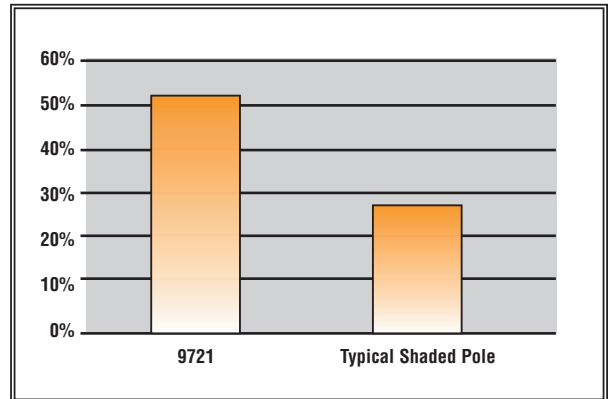

**Features:**

- ✓ Easy-to-Read Connection Diagram Attached to White Lead Wire
- ✓ **Now!** Four Studs on Each End
- ✓ 40°C Ambient
- ✓ Class B Insulation
- ✓ UL and CSA Recognized
- See Reverse Side for Outline Drawing and Additional Heatcraft Replacement Motors

\$ Less efficient shaded pole motors are often used in original equipment to cut costs. While they do allow some small savings in purchase price, the savings are quickly eaten up in electric bills at today's high power costs.

Stock No.	HP	Volts	Amps	RPM	Speeds	Frame	SF	HZ	Rotation	Wt.
9721•\$	1/12	115/208-230	1.1/0.5	1550	1	3.3"	1.0	60/50	Rev.	4.75

•Ball Bearing      \$ Energy Efficient


**NOW AVAILABLE!  
FAX OR PHONE YOUR ORDER TODAY!**

**Universal Electric Motors**

6200 Dixie Road, Unit 1, Mississauga, Ontario, L5T 2E1  
Tel.: 905.670.3380, 1.877.670.3380, Fax: 905.670.7637

# Heatcraft Replacement Motors Bohn, Chandler, Climate Control and Larkin

Stock No. 9721

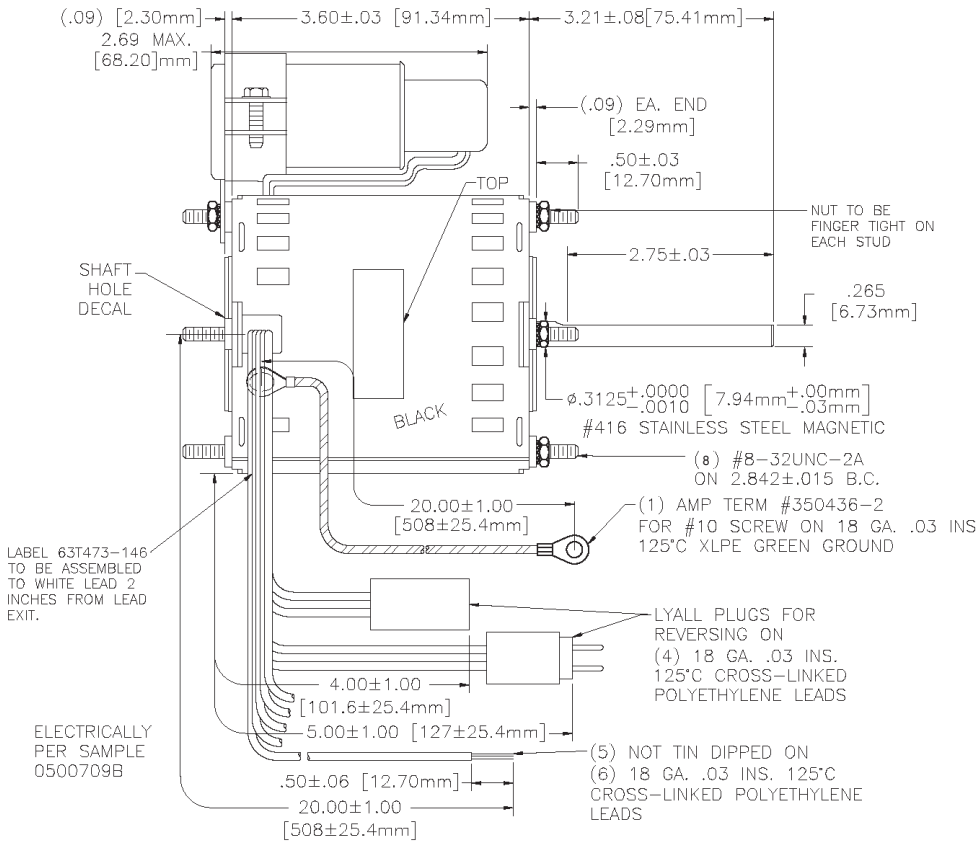

## Replacement for:

- Emerson 9650, 9651, 9652, 9653, 9656, 9664
- Fasco D1101, D1103, D1122, D1123, D1124, D1125, D1126, D1152, D1154, PD1125, PD1127 7163-2113, 7163-3371 7190-0442, 7190-2084 7190-2255, 7190-2285 7190-2969
- GE 5KSM59ES2001 5KSM59JSK143S 5KSM59JS5036S 5KSM59LS2262AS
- Rotom R358, R359, R368, R369, R1052, R1053, R313, R314

## Additional Heatcraft Replacement Motors

Bohn, Chandler, Climate Control and Larkin



HP	RPM	Speeds	Volts	Amps	Stock No.	Rot.	Capacitor	Shaft Diameter & Length	Motor Dia.	"A" Dim.	Cross Reference	Notes
1/20	1550	1	115	1.9	572A	CCWLE	Shaded Pole	5/16" x 3"	3-3/8"	3"	5034LS, 5008SS	4
1/15	1550	1	208-230	1.3	573A	CCWLE	Shaded Pole	5/16" x 3"	3-3/8"	3-5/8"	5034MS, 5008TS	4
1/20	1550	1	115	1.6	574	CWLE	Shaded Pole	5/16" x 2-1/2"	3-3/8"	2-3/4"	253-1194	4
1/20	1550	1	208-230	.81	575	CWLE	Shaded Pole	5/16" x 2-1/2"	3-3/8"	2-3/4"	253-1195	4
1/12	1550/1400	1	208-230	0.5	9720A	CWLE	Included	5/16" x 2-5/8"	3-3/8"	3-5/8"	D1125, 7190-0442, 7190-2084, 9656, 7071061, 25309101	4,150
1/2	1075	1	208-230	4.8	992*	REV	Included	1/2" x 2-3/4"	5-5/8"	6-3/4"	5KCP39PGH728T, S88-667, SCS0500H1-CPM120-3, D863	

- Notes:  
 4. Supplied with Lead and Plug Assembly  
 150. Rated 50/60 Hz  
 • Ball Bearing

