



# EZ16™

## UNIVERSAL ECM REPLACEMENT FOR FURNACES AND AIR HANDLERS



Truck Stock



Universal Replacement



Field Tunable with EZI (included)



Replaces Thousands of OEM Models

Improved Reliability With:



Built-in 6,000 Volt surge protection



Industry-leading moisture protection



**16-Pin Variable Speed Replacement Motor**

### EZ Interface (EZI) as easy as 1,2,3...



- 1 Select your voltage
- 2 Select your horsepower
- 3 Adjust your airflow to meet requirements

#### EZI

- Direct drop-in
- Connects the same as OEM
- Adjustable airflow at point of installation
- Multi-HP trim function to increase flexibility
- Remote mount for ease of access
- Universally compatible with all 2.0, 2.3, EON motors and Nidec16X4W

# SPECIFICATIONS

**HORSEPOWER:** 1/3, 1/2, 3/4 and 1 HP

**VOLTAGE:** 1Ø, 115, 208-230 Vac

**SPEEDS:** 1075/Var

**ROTATION:** CCW or CW (24Vac) /  
Auto-Rotation (PWM)

**INPUTS:** 24Vac or PWM

**HERTZ:** 50/60 Hz


**OPERATION MODE:** Constant Torque

**FRAME:** NEMA<sup>®</sup>† 48

**ENCLOSURE:** Open Air Over (OAO)

**EFFICIENCY:** Up to 82%

**MOUNTING:** Belly-band

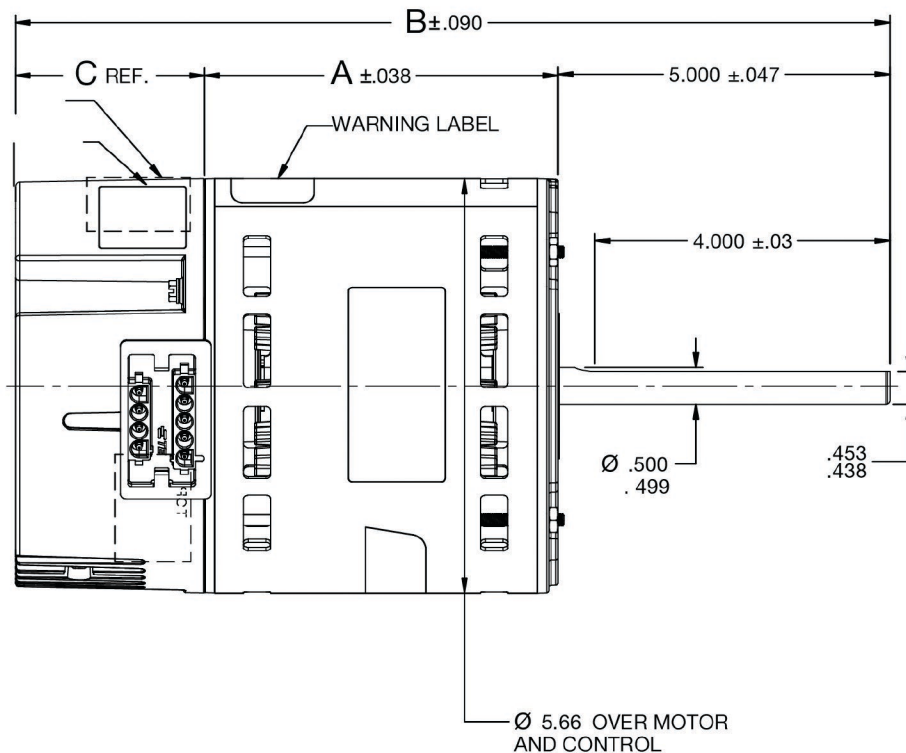

CATALOG NUMBER	HP	VOLTS	AMPS	RPM	DIM. A	DIM. B	DIM. C
5863	1/3	115/208-230	4.5/2.9-2.7	1075/Var	3.412	10.475	2.063
5862	1/2-1/3	115/208-230	6.4/4.0-3.8	1075/Var	3.662	10.725	2.063
5861	3/4-1/3	115/208-230	9.3/5.9-5.5	1075/Var	4.037	11.100	2.063
5860	1-1/3	115/208-230	12.1/7.6-7.1	1075/Var	4.412	11.975	2.563



**UNIVERSAL ELECTRIC MOTORS**  
DIVISION of 1279311 ONTARIO INC.  
TEL.: (905)670-3380 Fax: (905)670-7637  
TOLL FREE: 1-877-670-3380

